

Recom REC5-S/DRWL-Z Series

5 W DC/DC Converters, Regulated, Wide Input 2:1 & 4:1 (Single & Dual)

CoolPower
Solutions

Selection Guide

Part Number 1" x 2"	Input Voltage (VDC)	Output Voltage (VDC)	Output Current (mA)	Efficiency (%)
REC5-XX033SRWL	9-18, 18-36, 36-72	3.3	1500	70
REC5-XX05SRWL	9-18, 18-36, 36-72	5	1000	75
REC5-XX09SRWL	9-18, 18-36, 36-72	9	556	80
REC5-XX12SRWL	9-18, 18-36, 36-72	12	417	80
REC5-XX15SRWL	9-18, 18-36, 36-72	15	333	81
REC5-XX05DRWL	9-18, 18-36, 36-72	±5	±500	75
REC5-XX09DRWL	9-18, 18-36, 36-72	±9	±278	80
REC5-XX12DRWL	9-18, 18-36, 36-72	±12	±208	80
REC5-XX15DRWL	9-18, 18-36, 36-72	±15	±167	81
REC5-XX033SRWLZ	9-36, 18-72	3.3	1500	70
REC5-XX05SRWLZ	9-36, 18-72	5	1000	75
REC5-XX09SRWLZ	9-36, 18-72	9	556	78
REC5-XX12SRWLZ	9-36, 18-72	12	417	80
REC5-XX15SRWLZ	9-36, 18-72	15	333	81
REC5-XX05DRWLZ	9-36, 18-72	±5	±500	75
REC5-XX09DRWLZ	9-36, 18-72	±9	±278	78
REC5-XX12DRWLZ	9-36, 18-72	±12	±208	80
REC5-XX15DRWLZ	9-36, 18-72	±15	±167	81

XX = 9-18Vin = 12
 XX = 18-36Vin = 24
 XX = 36-72Vin = 48
 XX = 9-36Vin = 24
 XX = 18-72Vin = 48




Features

5W DIL Package
 9-18V, 18-36V, 36-72V and
 9-36, 18-72 Wide Input Range
 Short Circuit Protection
 Regulated Output
 100% Burned In
 Industry Standard Package
 UL94V-0 Package Material
 Efficiency to 81%

Specifications (Core Operating Area) and Operating Temperature / Derating-Graph

Voltage Setting Accuracy	±1% max.
Temperature Coefficient	±0.02%/°C
Ripple and Noise (20MHz BW)	100mVp-p max.
Line Regulation (HL-LL)	0.2% max.
Load Regulation (Rated Load to no Load)	0.5% max.
Voltage Stability (24 Hrs)	±0.05%
Short Circuit Protection	Continuous
Cooling	Free-Air Convection
Input Filter	Pi Network
Efficiency	70% min.
Isolation Voltage (Tested for 60 Seconds)	1.000VDC min.
Isolation Resistance	10 ⁹ ohms min.
Switching Frequency at Full Load	50kHz min.
Operating Temperature	-25°C to +70°C (see Graph)
Storage Temperature	-40°C to +100°C
Case Material	Metal Case

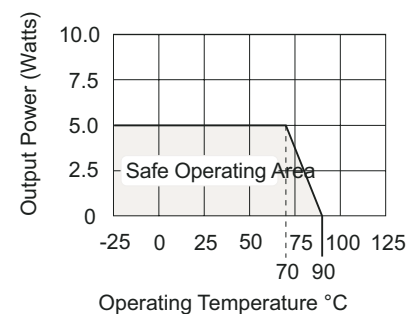

Cool Power Solutions Oy

Keskustie 6
 01900 Nurmijärvi

Puh: 09-2906 1990
 Fax: 09-2906 1991

info@coolpowersolutions.fi
 www.coolpowersolutions.fi


Recom REC5-S/DRWL-Z Series

5 W DC/DC Converters, Regulated, Wide Input 2:1 & 4:1 (Single & Dual)

CoolPower
Solutions

Package Style and Pinning (mm)

3rd angle projection 

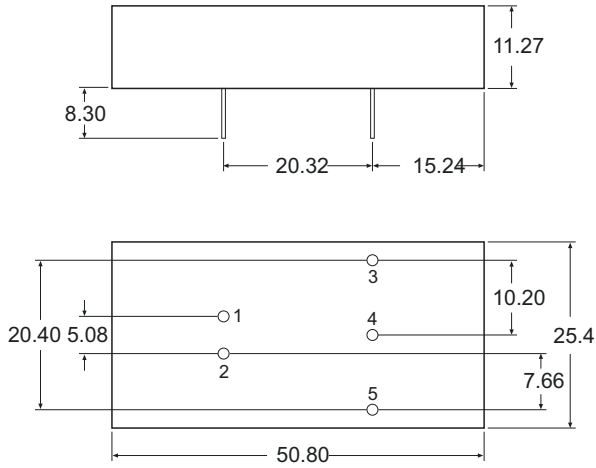

Pin Connections

Pin #	Single	Dual
1	+ Vin	+ Vin
2	- Vin	- Vin
3	+ Vout	+ Vout
4	No Pin	Common
5	- Vout	- Vout

XX.X ± 0.5 mm
XX.XX ± 0.25 mm

CoolPower
Solutions